


KHP2 离心泵

CENTRIFUGAL PUMP

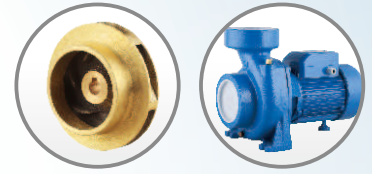

CONSTRUCTION


PUMP: Centrifugal
 Pump Body: Cast Iron
 Impeller: Brass
 Mechanical Seal: Carbon + Ceramic + Stainless Steel + Rubber
 Front Cover: Cast Iron

MOTOR: Single Phase Heavy Duty Continuous Work
 Motor Housing: Aluminium
 Shaft: Carbon Steel / 304 Stainless Steel Welded / 420 Stainless Steel
 Insulation: Class B / Class F
 Protection: IP44 / IP54
 Cooling: External Ventilation

结构特征

泵：单级离心泵
 泵体：铸铁
 叶轮：铜
 机械密封：石墨+陶瓷+不锈钢+橡胶
 前端盖：铸铁


电机：单相大马力连续工作制
 电机机座：铝压铸
 转轴：45#碳钢/304不锈钢焊接轴/整轴420不锈钢
 绝缘等级：B级/F级
 防护等级：IP44/IP54
 冷却方式：风冷

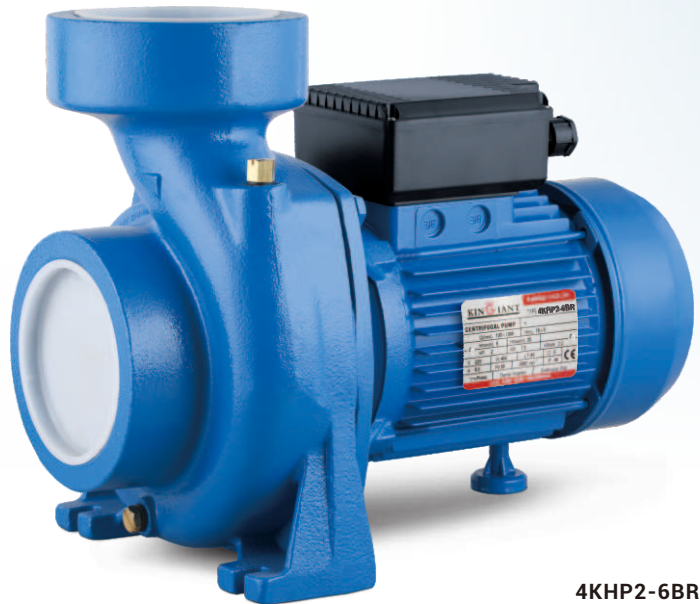

4KHP2-6BR

包装尺寸及毛重 PACKAGE DIMENSIONS & G.W.

型号 Model		长 L	宽 W	高 H	重量 KG	1X20"柜数量 1X20"FCL QTY (pcs)
单相 Monofase	三相 Trifase					
2KHP2-4	2KHP4	41	23	30	20	800
3KHP2-6c	3KHP6C	51	29	36	28.5	500
3KHP2-6B	-	51	29	36	29	500
-	3KHP6B	51	29	36	29.5	500
-	3KHP6A	51	29	36	30.5	500
4KHP2-6CR	4KHP6CR	51	29	36	29.5	500
4KHP2-6BR	-	51	29	36	30.5	500
-	4KHP6BR	51	29	36	30.5	500
-	4KHP6AR	51	29	36	31	500
-	4KHP8B	51	29	36	31.5	500
-	4KHP8A	51	29	36	33	500
-	4KHP20B	51	29	36	31.5	500
-	4KHP20A	51	29	36	33	500




安装尺寸图请查看58页。 For installation dimensions, please reference to page 58.

技术参数 PERFORMANCE SPECIFICATIONS


型号 Model		功率 Power		电流 Ampere (A)	最大 吸程 Suct. max (m)	进出口 管径 Inlet/ Outlet DIA	流量 Q=capacity																		
							m³/h0	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108
单相 Monofase	三相 Trifase	HP	kW	220V/50Hz			l/min0	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800
扬程 H (m)																									
2KHP2-4	2KHP4	1	0.75	5.2	9	2"x2"	10	9.8	9.3	8.7	8	7	6	4.7	3	-	-	-	-	-	-	-	-	-	-
3KHP2-6c	3KHP6C	1.5	1.1	7.8		3"x3"	11.9	-	11.7	11.3	10.7	10.2	9.2	8	6.7	5	3	-	-	-	-	-	-	-	-
3KHP2-6B	3KHP6B	2	1.5	9.6		3"x3"	14.7	-	14.5	14	13.5	12.8	12	11	9.7	8.2	6.7	5	-	-	-	-	-	-	-
-	3KHP6A	3	2.2	13.8		3"x3"	18.5	-	18.1	17.8	17.2	16.8	16	15	13.8	12.2	10.5	8.3	6	-	-	-	-	-	-
4KHP2-6CR	4KHP6CR	1.5	1.1	7.8		4"x4"	11.9	-	11.7	11.3	10.7	10.2	9.2	8	6.7	5	3	-	-	-	-	-	-	-	-
4KHP2-6BR	4KHP6BR	2	1.5	9.6		4"x4"	14.7	-	14.5	14	13.5	12.8	12	11	9.7	8.2	6.7	5	-	-	-	-	-	-	-
-	4KHP6AR	3	2.2	13.8		4"x4"	18.5	-	18.1	17.8	17.2	16.8	16	15	13.8	12.2	10.5	8.3	6	-	-	-	-	-	-
-	4KHP8B	4	3	18		4"x4"	21.5	-	21	20.7	20	19.5	18.8	17.8	16.5	15	13.5	11.2	9	-	-	-	-	-	-
-	4KHP8A	5.5	4	-		4"x4"	24.5	-	24	23.5	23	22.5	21.8	20.8	19.5	18.3	16.8	15	13	-	-	-	-	-	-
-	4KHP20B	4	3	13.8		4"x4"	16	-	-	-	15.5	15.4	15.3	15.2	15	14.5	14	13	12	10.7	9	7	4.8	2	-
-	4KHP20A	5.5	4	-	4"x4"	19	-	-	-	18.5	18.4	18.3	18.2	18	17.5	17	16.2	15.2	13.7	12	10	7.8	5	2	

*110V,110/220V,60Hz etc. Models are available on request.

离心泵系列 CENTRIFUGAL PUMP SERIES

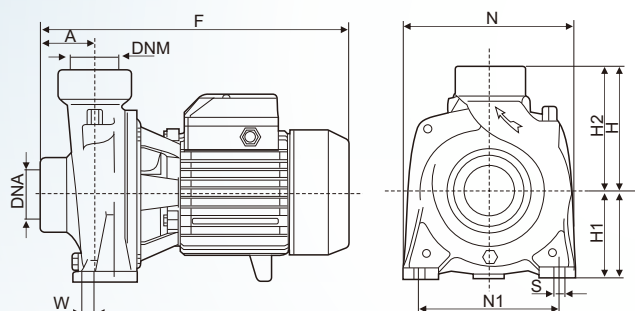

KHP1 Series

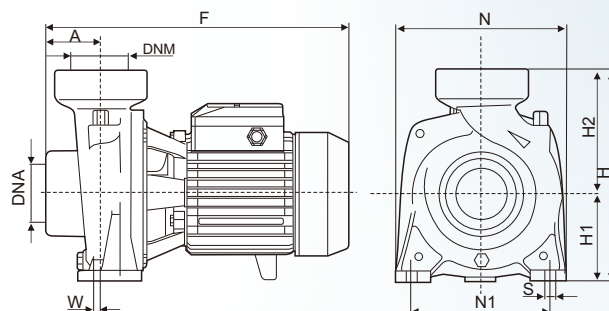

KHP2 Series

安装尺寸 INSTALLATION DIMENSIONS

型号 Model		尺寸 DIMENSIONS (mm)								
单相 Monofase	三相 Trifase	A	F	H	H1	H2	N	N1	W	S
1.5KHP1-50B	1.5KNP50B	45	276	200	82	118	165	135	1	15.30
1.5KHP1-50A	-	45	283	200	82	118	165	135	1	15.80
-	1.5KNP51A	45	276	200	82	118	165	135	1	16.30
1.5KHP1-51B-A	1.5KNP1-51B-A	45	300	225	92	133	190	160	4	16.80
1.5KHP1-60	1.5KNP60	48.8	347	269	114	155	216	171	12	18.50
1.5KHP1-70B	-	48.5	367	269	114	155	216	171	12	19.50
-	1.5KNP-70B	48.5	347	269	114	155	216	171	12	19.50
-	1.5KNP-70A	48.5	367	269	114	155	216	171	12	20
2KHP1-B-A	2KNP-5C-B-A	60	332	238	97	141	196	160	14	20
2KHP1-5BM	2KNP-5BM	51	360	260	110	150	206	160	1	24
2KHP1-5AM	-	51	380	260	110	150	206	160	1	25
-	2KNP-5AM	51	360	260	110	150	206	160	1	25
2KHP2-4	2KHP4	55	323	240	97	143	190	155	-	20
3KHP2-6c	3KHP6C	68	385	312	120	192	240	190	6	28.5
3KHP2-6B	-	68	405	312	120	192	240	190	6	29
-	3KHP6B	68	385	312	120	192	240	190	6	29.5
-	3KHP6A	68	405	312	120	192	240	190	6	30.5
4KHP2-6CR	4KHP6CR	70	387	312	120	192	240	190	6	29.5
4KHP2-6BR	-	70	407	312	120	192	240	190	6	30.5
-	4KHP6BR	70	387	312	120	192	240	190	6	30.5
-	4KHP6AR	70	407	312	120	192	240	190	6	31
-	4KHP8B	80	429	312	132	180	245	190	30	31.5
-	4KHP8A	80	475	312	132	180	245	190	30	33
-	4KHP20B	80	429	312	132	180	245	190	30	31.5
-	4KHP20A	80	475	312	132	180	245	190	30	33